

THE LARI METHOD FOR ISO-CAM/PHOT DATA REDUCTION AND ANALYSIS

Carlo Lari^{1*}, Mattia Vaccari^{2,3}, Giulia Rodighiero², Dario Fadda⁴, Carlotta Gruppioni^{5,6}, Francesca Pozzi⁷, Alberto Franceschini², and Gianni Zamorani⁶

¹Institute of Radio Astronomy, CNR, Via Gobetti 101, I-40122, Bologna, Italy

²Department of Astronomy, University of Padova, Vicolo dell'Osservatorio 5, I-35122, Padova, Italy

³CISAS "G. Colombo", University of Padova, Via Venezia 15, I-35131, Padova, Italy

⁴Instituto de Astrofísica de Canarias, Via Lactea S/N, E-38205, La Laguna, Tenerife, Spain

⁵Padova Astronomical Observatory, INAF, Vicolo dell'Osservatorio 2, I-35122, Padova, Italy

⁶Bologna Astronomical Observatory, INAF, Via Ranzani 1, I-40127 Bologna, Italy

⁷Department of Astronomy, University of Bologna, Via Ranzani 1, I-40127, Bologna, Italy

ABSTRACT

The techniques and software tools developed for the reduction and analysis of ISO-CAM/PHOT data with the LARI method are presented. The method, designed for the detection of faint sources in ISO raster observations, is based on the assumption of the existence of two different time scales in the detectors' transient behaviour, accounting either for fast or slow detectors' response.

The specifically developed IDL software includes: a reduction pipeline performing basic operations such as deglitching and background determination; the fitting procedures proper, modelling the time history of individual pixels and detecting any flux excess with respect to the local background ascribable to potential sources; mapping, source extraction and flux estimation procedures; simulation procedures allowing one to estimate the errors arising from different instrumental and reduction effects. Moreover, an easy-to-use graphical user interface allows one to quickly browse the data and carry out the substantial amount of interactive analysis required when the automatic fit fails and to check the reliability of detected sources.

This method provides source lists of great reliability and completeness and an outstanding photometric accuracy, particularly at low redundancy levels, where the reliability of ISO-CAM/PHOT source lists, even at moderately bright flux levels, has been a long-standing issue.

In this work a description of the techniques and software tools that have been developed is given, alongside with some highlights from the results obtained thanks to their application to different fields.

Key words: methods: data analysis – infrared: general – surveys – catalogues

1. INTRODUCTION

All data gathered by the ISO satellite, and particularly those from the its two cameras, ISO-CAM and ISO-PHOT (hereafter simply CAM and PHOT), are very difficult to

* e-mail: lari@ira.bo.cnr.it

reduce, both due to the strong transient behaviour of the cryogenically cooled detectors, e.g. after a change in the incident flux (Coulais et al. 2000), and to the frequent and severe cosmic ray impacts yielding qualitatively different effects (known as common glitches, faders, dippers, drop-outs and others, Claret et al. 1998).

While it was variously demonstrated that it is possible, at least to a certain extent, to satisfactorily describe the satellite's different detectors' behaviour adopting some physical model, the large number of readouts involved in raster observations and the peculiar nature and strength of noise patterns also require efficient and robust algorithms to be developed so as to make the actual data reduction undertaking feasible in a nearly-automatic way.

A number of data reduction methods has thus been developed and tested, mostly on CAM deep fields (e.g. the PRETI method by Starck et al. 1999 and the Triple Beam Switch method by Désert et al. 1999). Unfortunately, such methods proved useless for all PHOT data or on CAM shallower fields, leading to a high number of false detections and severe incompleteness. Besides, these methods suffered from the lack of an efficient way to interactively check the quality of the data reduction when needed.

The LARI method, originally developed as an answer to the problems posed by the reduction of the observations carried out as part of the ELAIS survey (Oliver et al. 2000) and first presented in Lari et al. 2001, has been devised to overcome these difficulties and provide a fully-interactive technique for the reduction and analysis of CAM/PHOT raster observations at all flux levels, particularly suited for the detection of faint sources and thus for the full exploitation of the scientific potential of the ISO archive.

2. THE MODEL

The LARI method describes the sequence of readouts, or time history, of each pixel of CAM/PHOT detectors in terms of a mathematical model for the charge release towards the contacts. Such a model is based on the assumption of the existence, in each pixel, of two charge reservoirs, a short-lived one Q_b (breve) and a long-lived one Q_l (lunga), evolving independently with a different time constant and fed by both the photon flux and the cosmic

rays. Such a model is fully conservative, and thus the observed signal S is related to the incident photon flux I and to the accumulated charges Q_b and Q_l by the

$$S = I - \frac{dQ_{tot}}{dt} = I - \frac{dQ_b}{dt} - \frac{dQ_l}{dt}, \quad (1)$$

where the evolution of these two quantities is governed by the same differential equation, albeit with a different efficiency e_i and time constant a_i

$$\frac{dQ_i}{dt} = e_i I - a_i Q_i^2 \quad \text{where } i = b, l, \quad (2)$$

so that

$$S = (1 - e_b - e_l) I + a_b Q_b^2 + a_l Q_l^2. \quad (3)$$

The values of the parameters e_i and a_i are estimated from the data and are constant for a given detector, apart from the scaling of a_i for the exposure time and the average signal level along the pixel time history, which is governed by the

$$a_i = \frac{t}{t_0} \sqrt{\frac{S}{S_0}} a_{i,0}, \quad (4)$$

where $a_{i,0}$ is the value of a_i relative to a reference exposure time t_0 and average signal level S_0 . The model for the charge release, however, is exactly the same for CAM and PHOT detectors.

In practice, an additive offset signal attributable to thermal dark current (which is not accounted for in CIA/PIA pipeline dark current subtraction), is added to both S and I in the equation above when it is estimated to be important, i.e. when the deepest dippers' depth exceeds 10% of the background level.

The glitches (i.e. the effects of cosmic ray impacts on time history) are identified through filtering of the time history and modelled as discontinuities in the charge release, leaving as free parameters the charges at the beginning of the time history and at the peaks of glitches.

Iteration of the fitting procedure is interrupted when either a satisfactory data-model rms deviation is achieved or the maximum number of allowed iterations is reached. In Figure 1 it is shown how a successful fit is thus able to recover useful information (specifically, source fluxes) from otherwise troublesome parts of the pixel time history.

3. THE METHOD

The reduction pipeline consists of the following steps:

- PHOT ramps' linearization (following Rodighiero et al. 2001) and data smoothing (i.e. median averaging over a suitable number of readouts)
- Standard CIA/PIA **raster** structure and data-reduction-dedicated **liscio** structure building
- Dark current subtraction, stabilization (or global, as opposed to local, see below) background level estimation, bright sources' and glitches' identification
- Time history fitting procedure and interactive "repair" on fitting failures

- Interactive checks on sources detected in time history
- Flat-fielding, mapping (i.e. projection of fluxes measured along the pixel time histories onto a sky map), and source extraction (using DAOPHOT's **find**, particularly suited for the detection of point-like sources, as implemented in IDL Astronomy User's Library)
- Interactive checks on sources detected on sky maps and back-projected on pixel time histories
- Source flux autosimulation

The fitting procedure describes the time history of individual pixels according to the mathematical model seen in Section 2, allowing the determination of the breve and lunga charge levels, the local background (i.e. the signal to be expected on the basis of the previously accumulated charges if only the stabilization background flux were hitting the detector) and the flux excess ascribable to potential sources at any given readout).

The so-called autosimulation procedure for source flux estimation accounts for mapping effects in the determination of the total flux of detected sources through the following steps:

- First guess of source total flux, based on its observed peak flux on the map
- Back-projection of source from sky map on pixel time histories, i.e. construction of theoretical pixel time histories
- Projection of theoretical pixel time histories onto a sky map, i.e. construction of a theoretical sky map
- Determination of theoretical peak flux on theoretical sky map
- Source first-guess total flux correction based on observed / theoretical peak flux ratio

Other factors affecting the source flux estimates, namely those arising from the detectors' transient behaviour and possible systematic deviations from nominal sensitivities as well as from the reduction technique, are then evaluated through simulations and absolute flux calibration.

Once the reduction of all rasters of interest has been completed according to the recipe above, one can determine the necessary corrections to nominal astrometry (e.g. performing a cross-correlation analysis between the list of detected sources and a suitable external catalogue) and project nearby or repeated fields onto a common mosaic sky map, on which source extraction, autosimulation and interactive checks can furtherly be performed so as to increase the quality of the reduction through cross-checks of detected sources on different rasters, thus partly overcoming the severe problems at their boundaries.

4. THE SOFTWARE

The method relies on CIA (Ott et al. 2001) and PIA (Gabriel and Acosta-Pulido 1999) for basic raw data reading and manipulation and on home-made IDL routines for the data reduction proper. The massive necessary amount

of interactive analysis is carried out with an easy-to-use graphical user interface, a screenshot of which is shown in Figure 2, which allows any kind of visual check and interactive “repair” which may be necessary.

5. RESULTS / WORK IN PROGRESS

All parameters indicating the goodness of the reduction (reliability, completeness, astrometric and photometric accuracy) are heavily dependent on the adopted observing parameters as well as on the thresholds chosen in the interactive “repair”, and thus can only be evaluated through simulations.

While the catalogue resulting from the reduction of the first portion of ELAIS 15 μm data (Lari et al. 2001) is successfully being used for different purposes (see e.g. Gruppioni et al. 2002 and Matute et al. 2002), and the reduction of several different fields has already been completed, simulations and accurate photometric calibration are still being carried out, so that it is not presently possible to show detailed results. A list of the different projects being carried out includes:

- ELAIS 15 μm and 90 μm fields (Vaccari et al. 2002)
- Lockman Hole Shallow (LHS) and Deep (LHD) 15 μm and 90 μm fields (Fadda et al. 2002 and Rodighiero et al. 2002, see also Figure 3)
- Hubble Deep Field North and South (HDFs) 7 μm and 15 μm fields
- A few nearby galaxy cluster 7 μm and 15 μm fields

while highlights from the expected results can thus be summarized:

- A catalogue of around 2000 15 μm sources in the 0.3–100 mJy flux range from LHS and ELAIS fields
- Catalogues of the uttermost quality in smaller, cosmologically relevant fields such as the LHD and the HDFs
- Flux-level-dependent photometric calibration based on predicted stellar fluxes (CAM) or on internal/external calibrators’ reduction (PHOT)
- Unambiguous comparison of LARI fluxes with those obtained with different methods, e.g. on HDFs

6. CONCLUSIONS

Originated as an answer to the problems posed by the ELAIS data reduction, the LARI method has evolved into a complete and well-tested system for ISO-CAM/PHOT data reduction and analysis, especially designed for the detection of faint sources and the interactive check of detected sources. Raster observations carried out with ISO-CAM LW detector at 7 and 15 μm and with ISO-PHOT C100 detector at 90 μm have been successfully reduced, while tests are foreseen to apply the method to other ISO detectors, to ISO-PHOT C200 in particular.

Interactive by its very nature, the method both allows ISO-CAM/PHOT data reduction at all flux levels from

scratch and to check the quality of any independent data reduction undertaking, thus leading to extremely reliable and complete source catalogues. It is thus believed that the LARI method can prove a very efficient tool in providing the community with long-awaited agreed-upon results from ISO extragalactic surveys, possibly the ultimate legacy of the ISO mission.

ACKNOWLEDGEMENTS

This paper is based on observations with ISO, an ESA project with instruments funded by ESA Member States (especially the PI countries: France, Germany, the Netherlands and the United Kingdom) and with the participation of ISAS and NASA.

The ISOCAM data presented in this paper were analysed using CIA, a joint development by the ESA Astrophysics Division and the ISOCAM Consortium. The ISOCAM Consortium is led by the ISOCAM PI, C. Cesarsky.

The ISOPHOT data presented in this paper were reduced using PIA, which is a joint development by the ESA Astrophysics Division and the ISOPHOT Consortium with the collaboration of the Infrared Processing and Analysis Center (IPAC). Contributing ISOPHOT Consortium institutes are DIAS, RAL, AIP, MPIK, and MPIA.

This work was partly supported by the “POE” EC TMR Network Programme (HPRN-CT-2000-00138).

REFERENCES

- Claret A. et al. 1998, Glitch Effects in ISOCAM Detectors, ISO Technical Report
- Coulais A. et al. 2000, Transient response of IR detectors used in space astronomy: what we have learned from ISO satellite, ISO Technical Report
- Désert F. X. et al. 1999, A&A, 342, 363
- Fadda D. et al. 2002, ESA SP 511, this volume
- Gabriel C. and Acosta-Pulido J. A. 1999, ESA SP 427, 4
- Gruppioni C. et al. 2002, MNRAS, accepted, astro-ph/0205173
- Lari C. et al. 2001, MNRAS, 325, 1173
- Matute I. et al. 2002, MNRAS, 332, L11
- Oliver S., Rowan-Robinson M. et al. 2000, MNRAS, 316, 749
- Ott S., Gastaud R., Ali B., Delaney M., Miville-Deschênes M.-A., Okumura K., Sauvage M., and Guest S. 2001, ASP Conf. Ser. 238, 170
- Rodighiero G., Lari C. and Franceschini A. 2001, ESA SP 481
- Rodighiero G. et al. 2002, ESA SP 511, this volume
- de Ruiter H. R. et al. 1997, A&A, 319, 7
- Starck J. L. et al. 1999, A&AS, 138, 365
- Vaccari M. et al. 2002, ESA SP 511, this volume

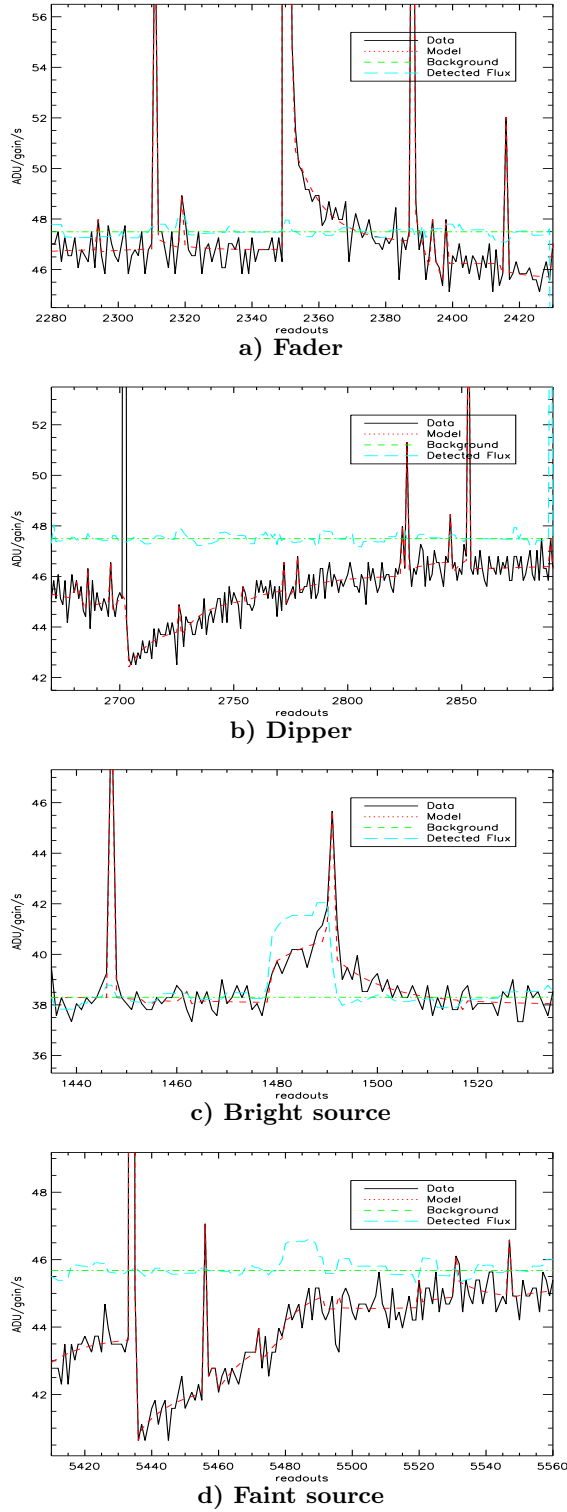


Figure 1. Different troublesome situations in CAM pixel time histories: a) Recovery of stabilization background level after a fader b) Recovery of stabilization background level after a dipper c) Detection of a bright source hidden by a strong common glitch d) Faint source hidden by the recovery of the stabilization background level after a dipper.

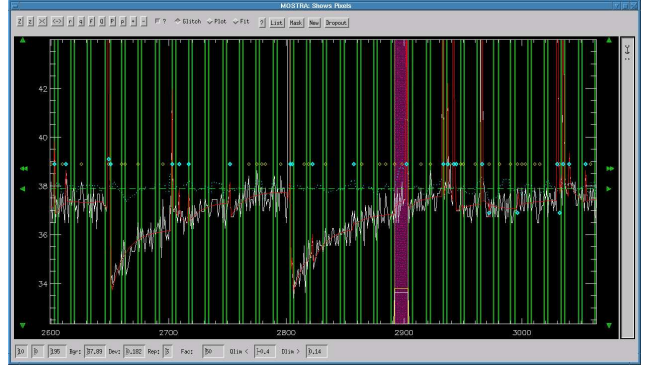


Figure 2. A screenshot of the IDL widget-based Graphical User Interface used to carry out interactive analysis.

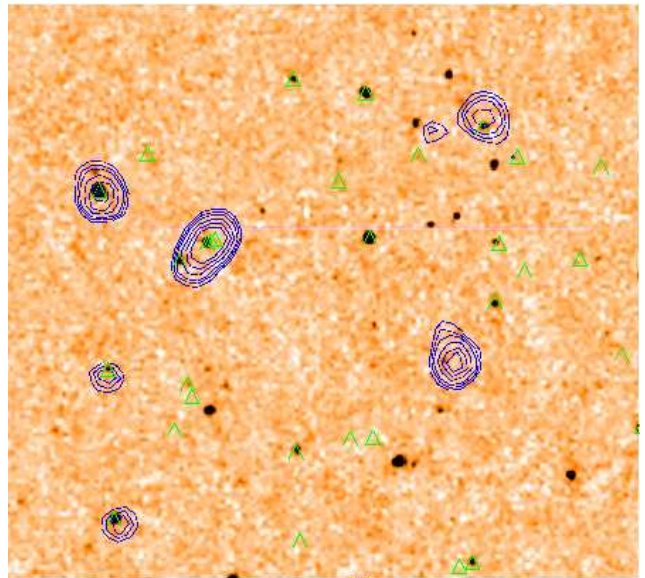


Figure 3. $15' \times 15'$ Lockman Hole $15 \mu\text{m}$ map, with overlaid $90 \mu\text{m}$ contours (blue lines) and radio sources (green triangles, from de Ruiter et al. 1997)